

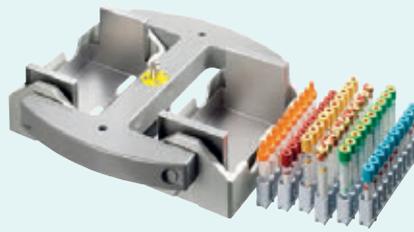
## Swing-out rotor, 2-place



↻ 90°


n = 3,600 min<sup>-1</sup>  
max. RCF 2,652


illustrated with carriers 4285-A,  
adapters 4281 and Deep Well Plates



illustrated with carriers 4285-A,  
adapters 4283-B and Olympus racks

**Cat. No.** (without carriers) **4282**

DxWxH in mm	86x128x15	86x128x17.5	86x128x22	86x128x44.5	59x84x11	82x124x20	-
Cat. No.	MTP		CP	DWP	Microtest plate (Terasaki)	PCR plate, 96 wells	PCR strips
 carrier Cat. No. 4285-A  <b>rotor</b> Cat. No. 4282							
	 <b>Cat. No. 4281</b>					 <b>4281 + 2x 1485</b>	
boring Ø x L in mm	-						
plates/racks per rotor	16		12	4		48x8	
max. RCF <sup>2)</sup>	2,434						
radius in mm	168						
run-up in sec	87						
run-down in sec, braked	94						
temperature in °C <sup>1)</sup>	-2						

DxWxH in mm	20x176x41	20x118x70	25x193x60	110x210x44
Cat. No.	Olympus racks	Hitachi racks	Behring racks	rack, 50-place
 carrier Cat. No. 4285-A  <b>rotor</b> Cat. No. 4282				
				
<b>Cat. No.</b>	<b>4283-B</b>	<b>4287-B</b>	<b>4288-A</b>	<b>4263-A</b>
boring Ø x L in mm	-			
plates/racks per rotor	12	20	10	2
max. RCF <sup>2)</sup>	2,652		2,579	
radius in mm	183		178	
run-up in sec	87			
run-down in sec, braked	94			
temperature in °C <sup>1)</sup>	-2			

<sup>1)</sup> Lowest attainable temperature in precooled refrigerated centrifuges at max. speed. Lower temperatures can be attained by reducing the speed.

<sup>2)</sup> Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote <sup>2)</sup> is 4,000.

<sup>5)</sup> Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.